



RV Door Lock Cude Lock ZK-60

Product Specifications & Details

Product Name: ZK-60 Smart RV Door Lock
Dimensions: 5.9 in × 4.7 in × 3.5 in (L × W × H)

Surface Finish: Anti-oxidation, UV-resistant, and weatherproof powder coating for long-lasting outdoor protection.

Control Methods: Mechanical key , remote fob, keypad password, and interior safety lever.

Weight: 3.5 lbs Country of Origin: Made in China

Lock Hole Opening Size:

Standard: 3.75 in × 2.75 in × 1.25-1.5 in (H × W × Door Thickness)


Maximum: 4.5 in × 5.5 in × 1.5 in (H × W × Door Thickness)

Power Supply: Requires 4 × AA batteries (Ultra-low consumption due to Zero-Load technology).

Package Includes: 2 × Keys , 2 × Remote Fobs, 1 × Smart Lock , 1 × Pinch Plate, 1 × Strike Plate, 4 × Mounting Screws, 1 × Screwdriver, 1 × User Manual.

Official Support & Installation:

For more details, step-by-step installation instructions, visit: <https://lock.zkce.com>

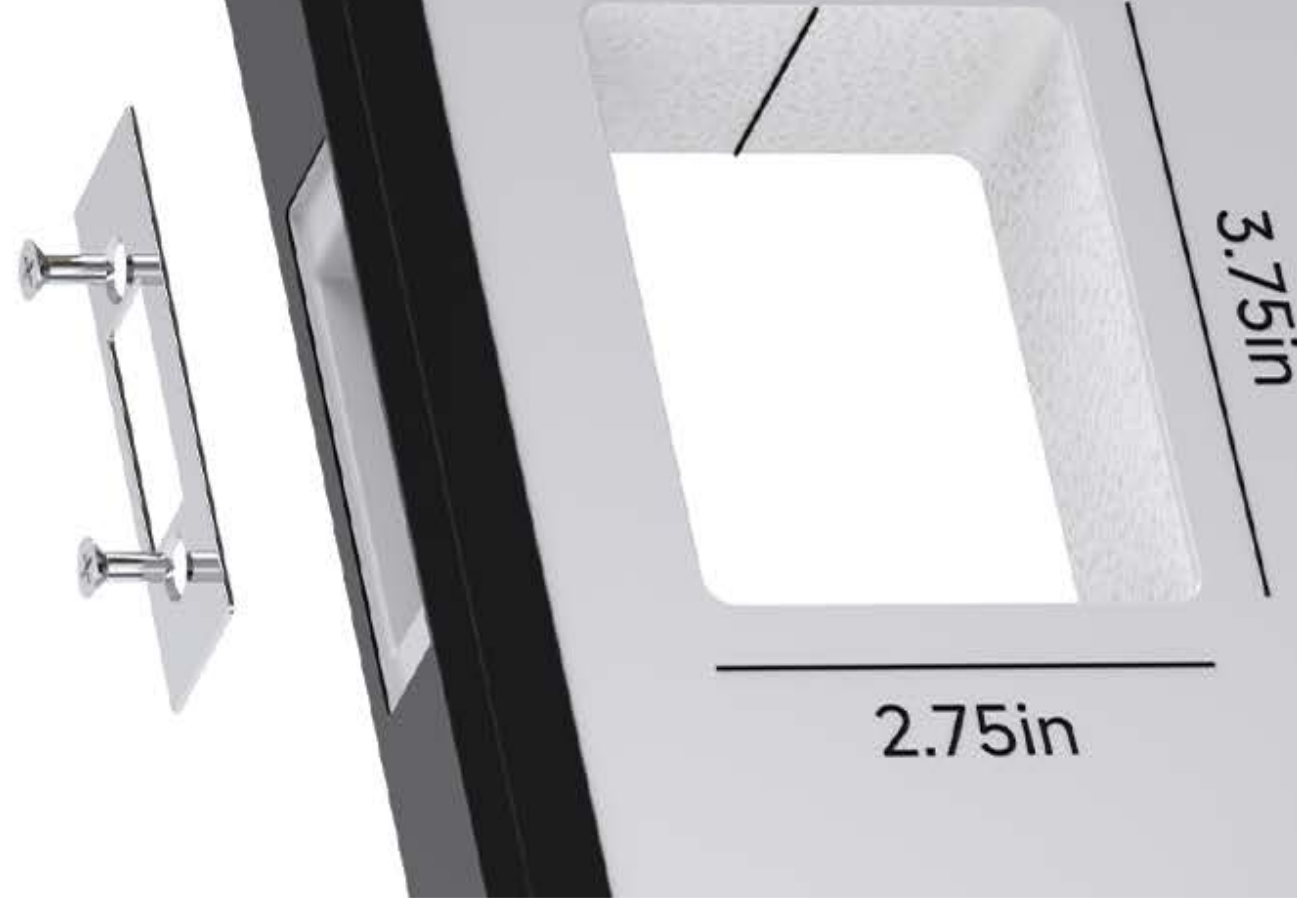


Universal Fit for Travel Trailers & 5th Wheels

Cutout: 2.75" × 3.75"


Door Thickness: 1.25" – 1.5"

Lock Hole Opening Size

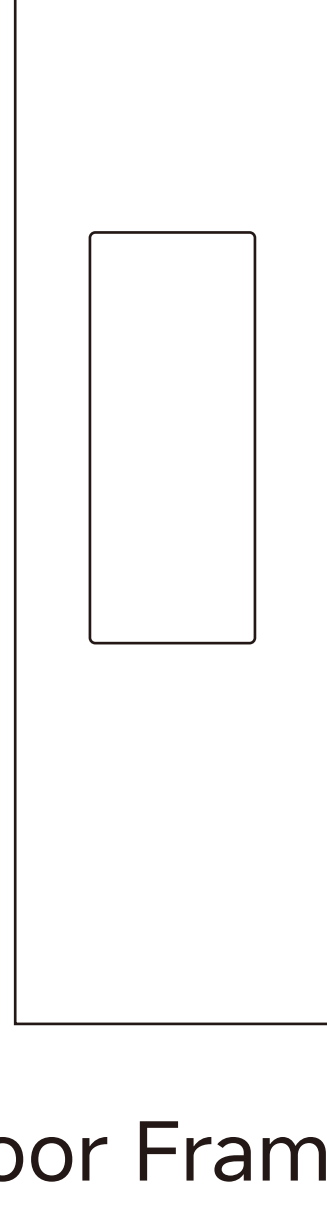

Door Frame

Door Thickness: 1.25-1.5in

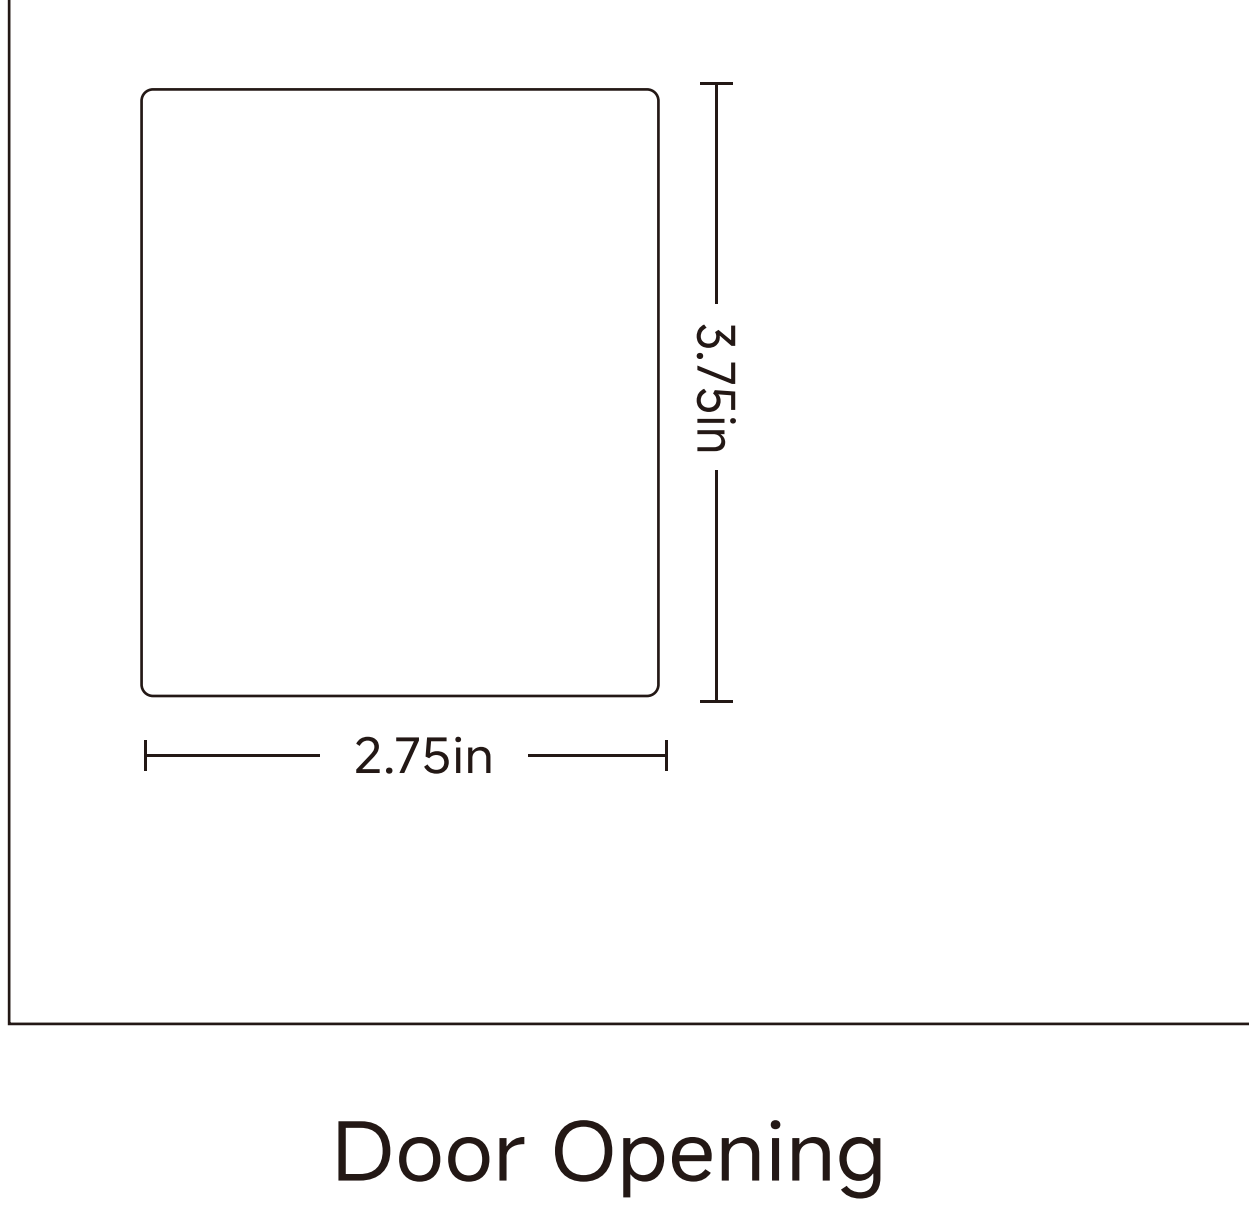

Door Opening

Standard: 3.75 in × 2.75 in (H × W)

Maximum: 4.5 in × 5.5 in (H × W)

Built Like a Tank.


90%+ Zinc Alloy Body

5.9" × 4.7"

Heavy-Duty Security for Every RV Door




Step1:

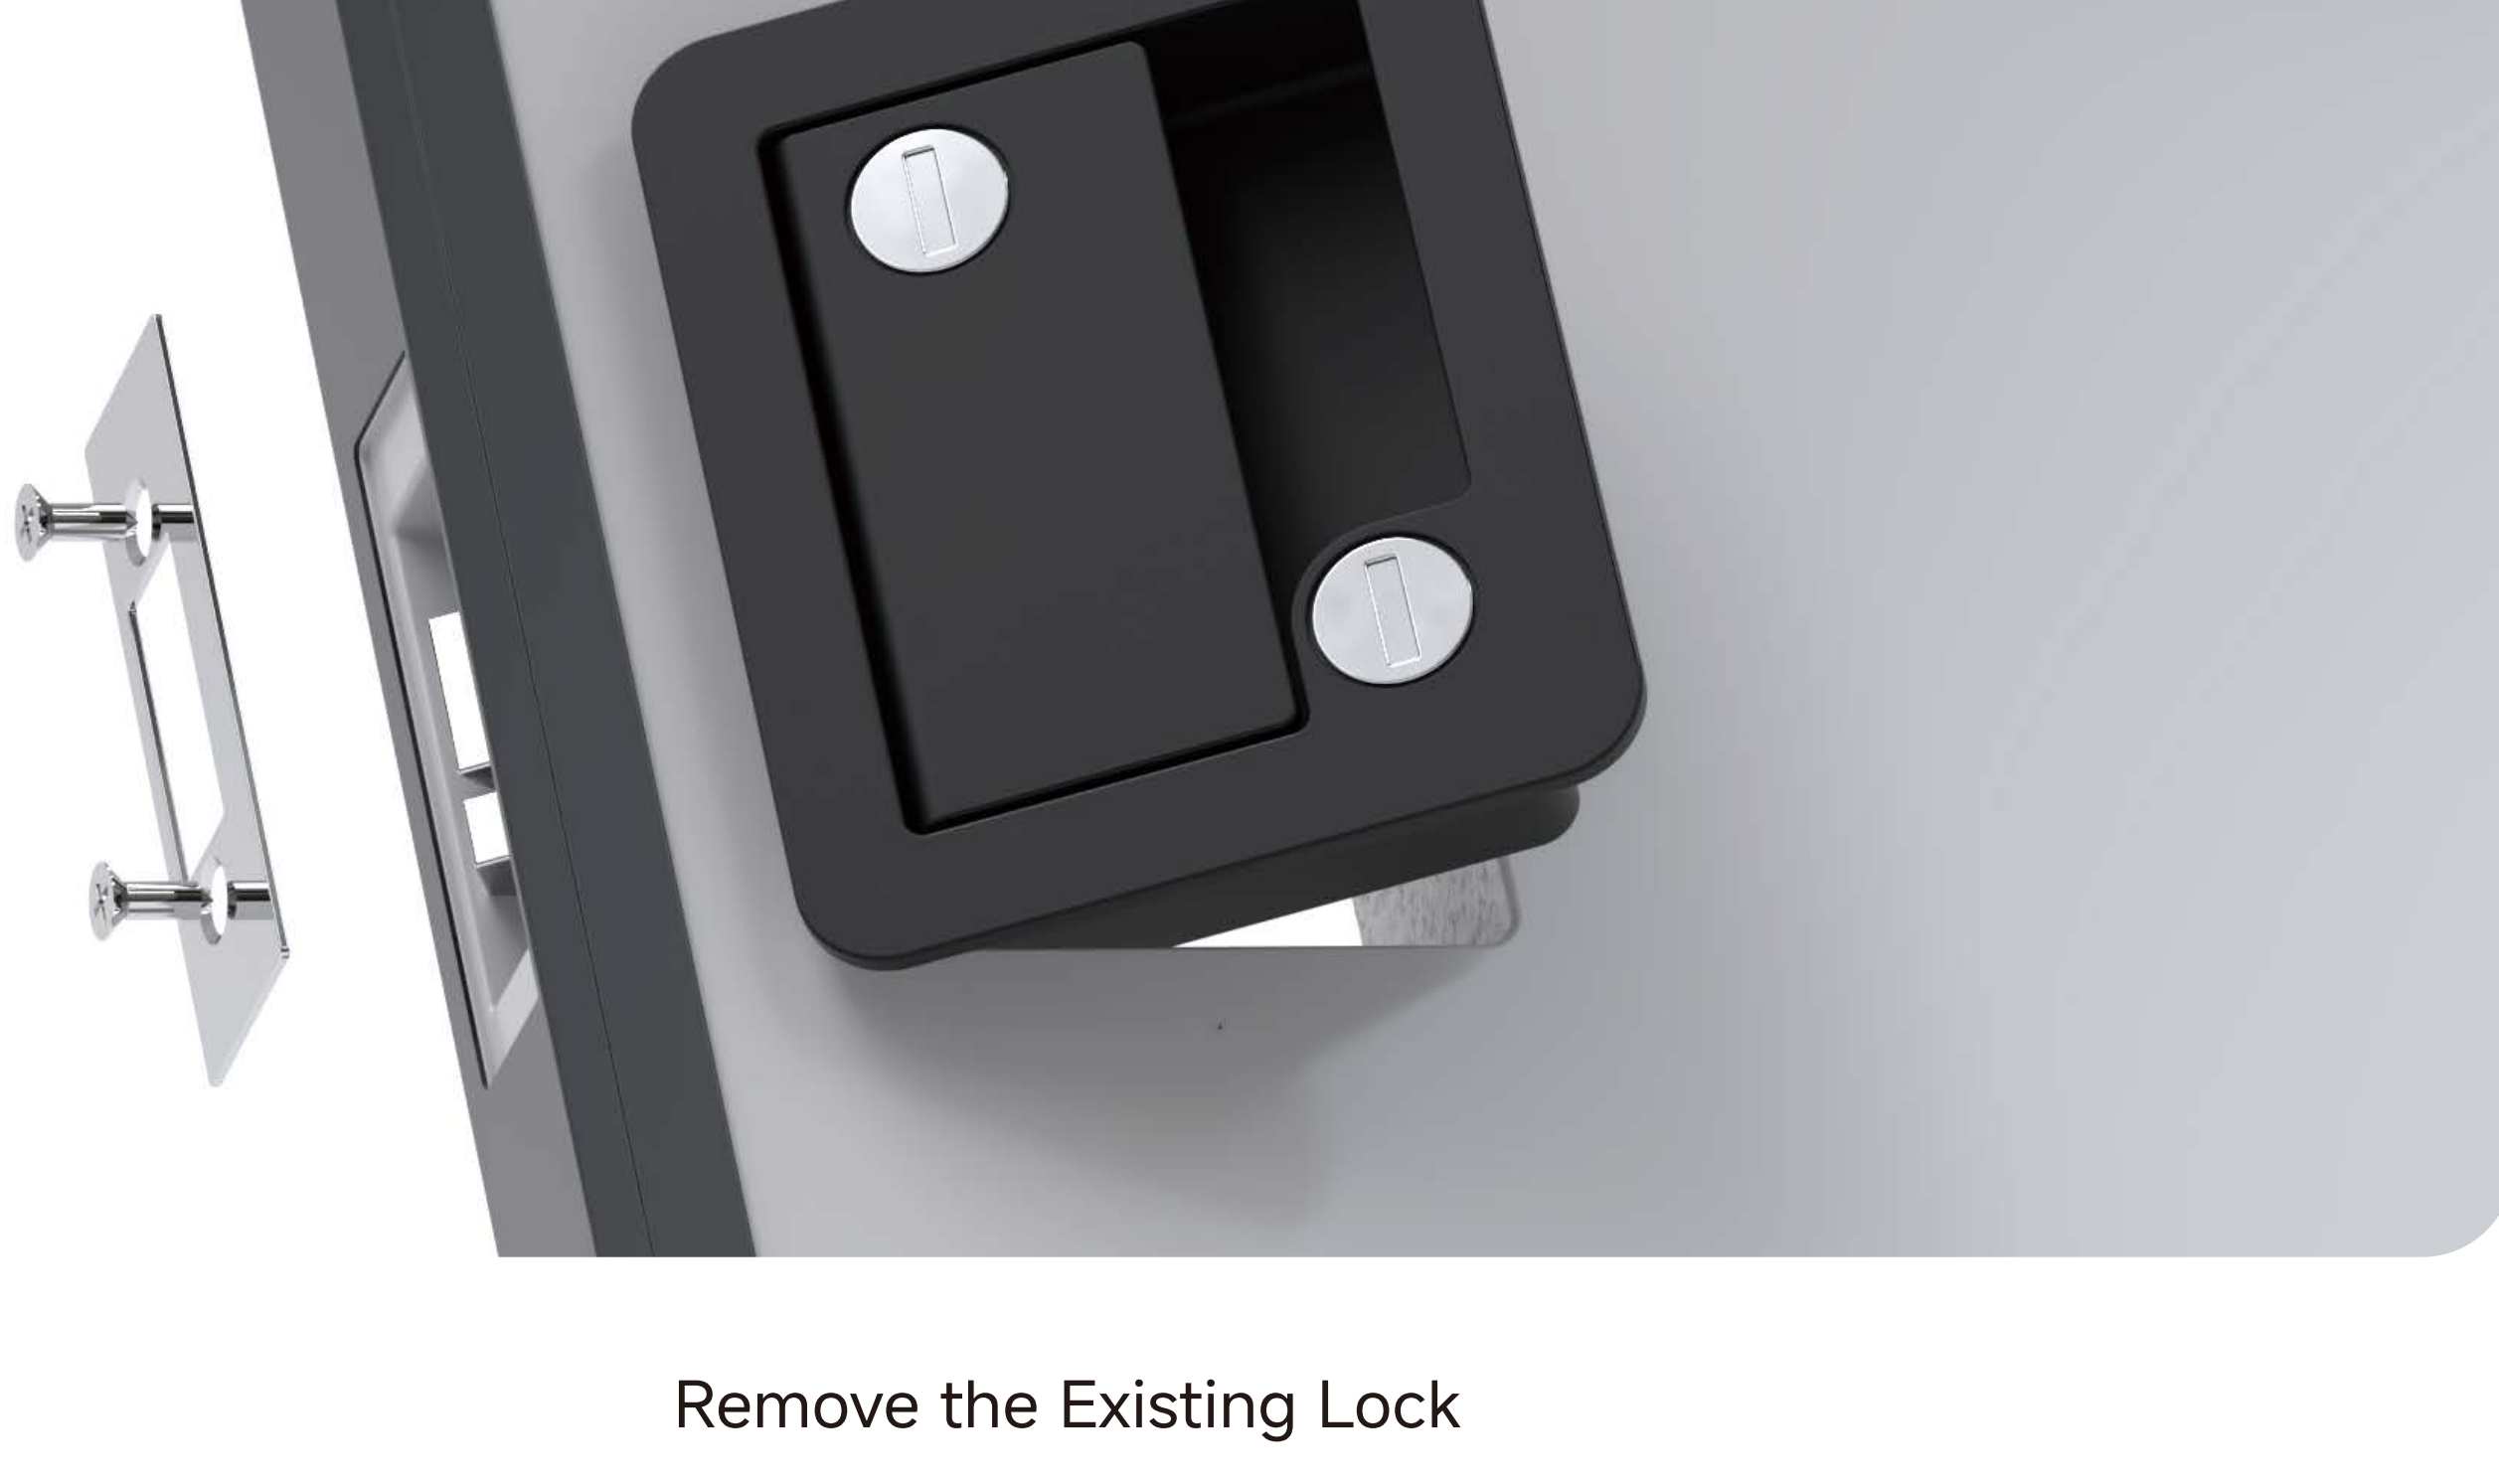

Remove the Existing Lock

Step2:

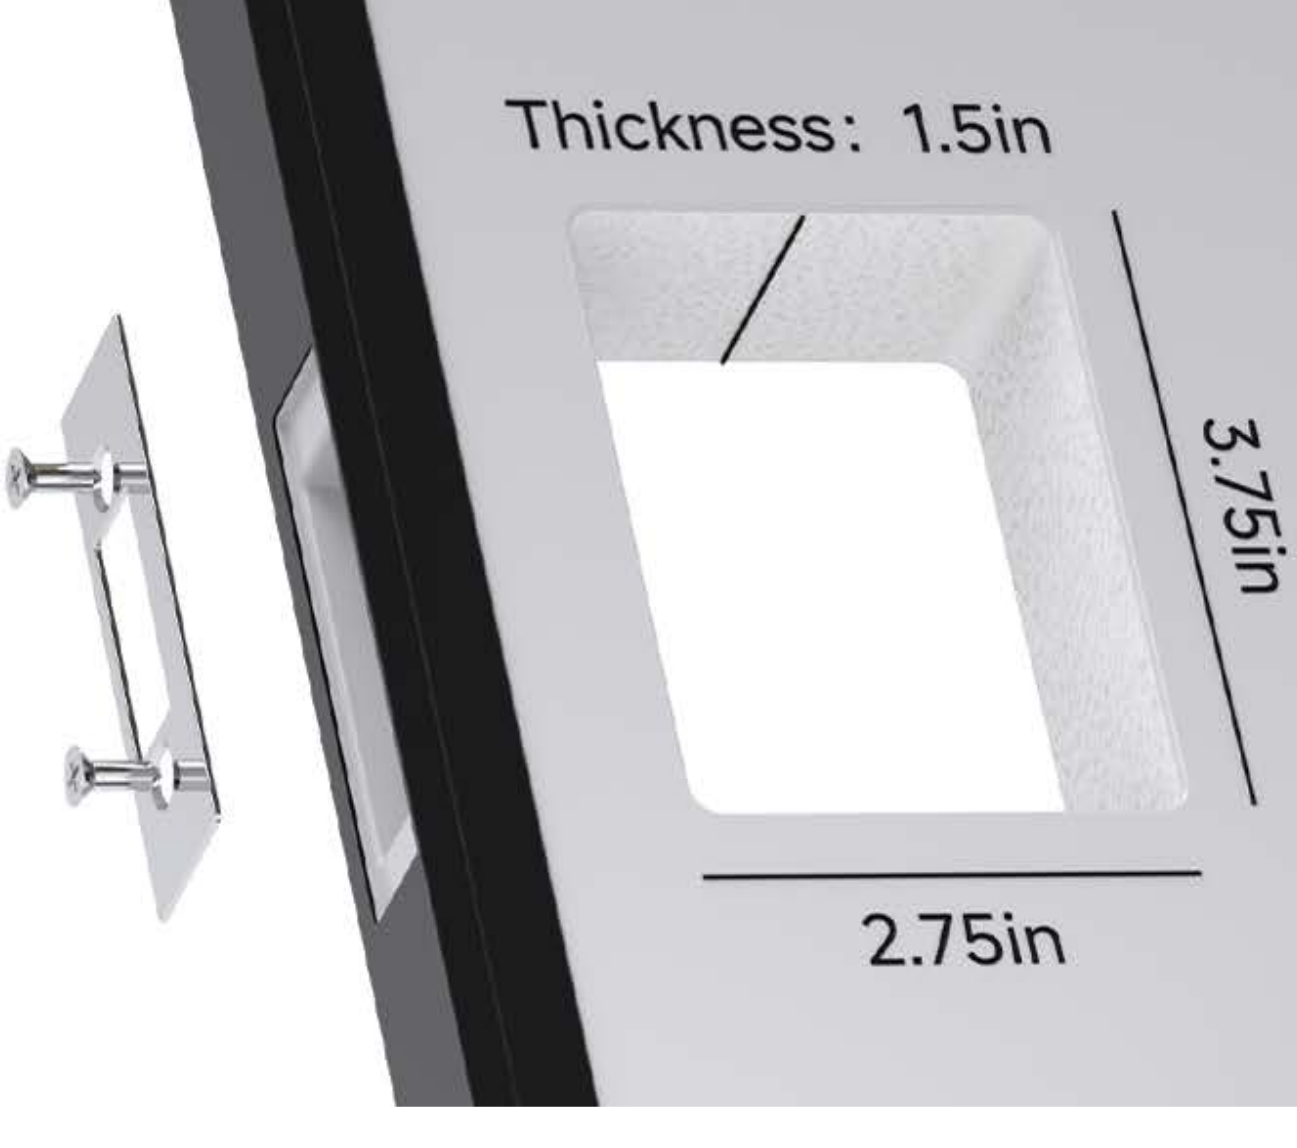

Universal Fit for Travel Trailers & 5th Wheels

Cutout: 2.75" × 3.75"

Door Thickness: 1.25" – 1.5"

Verify Door Dimensions

Step3:



Installing the Exterior Assembly & Pinch Plates

Step4:



1、Wire Connection

Connect the wire harness. Place the cables into the cable groove to prevent pinching.

2、Alignment & Assembly

·Align both the handle-to-latch linkage and the motor D-shaft with the switch D-slot.

·Close the inside lock body and install the four screws.

Step5:



Secure the 4 Mounting Screws

Step6:



Securing the Lock & Power Activation